




# NTL BEARINGS LTD.

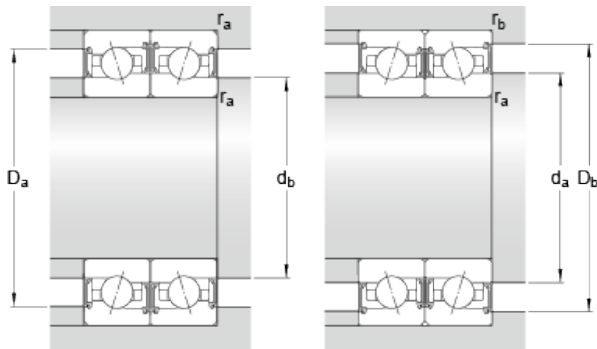

## S7013 ACE/HCP4BVG275 SKF High Speed Angular Contact Ball Bearings

Bearing No. S7013 ACE/HCP4BVG275

S7013 ACE/HCP4BVG275 Bearing 2D drawings and 3D CAD models

d	65 mm
D	100 mm
B	18 mm
d <sub>1</sub>	77.26 mm
d <sub>2</sub>	74.9 mm
D <sub>2</sub>	91.1 mm
r <sub>1,2</sub> min.	1.1 mm
r <sub>3,4</sub> min.	0.6 mm
a	28.4 mm
d <sub>a</sub> min.	71 mm
d <sub>a</sub> max.	76.5 mm
d <sub>b</sub> min.	71 mm
d <sub>b</sub> max.	74.1 mm
D <sub>a</sub> max.	94 mm
D <sub>b</sub> max.	95.8 mm
r <sub>a</sub> max.	1 mm
r <sub>b</sub> max.	0.6 mm
Basic dynamic load rating C	19.5 kN
Basic static load rating C <sub>0</sub>	14.6 kN
Fatigue load limit P <sub>u</sub>	0.62 kN
Attainable speed for grease lubrication	20000 r/min
Ball diameter D <sub>w</sub>	8.731 mm
Number of balls z	25
Preload class A G <sub>A</sub>	170 N
Static axial stiffness, preload	146 N/ μ m



## NTL BEARINGS LTD.

class A	
Preload class B $G_B$	520 N
Static axial stiffness, preload class B	220 N/ $\mu$ m
Preload class C $G_C$	1040 N
Static axial stiffness, preload class C	287 N/ $\mu$ m
Calculation factor f	1.09
Calculation factor $f_1$	0.99
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.03
Calculation factor $f_{2C}$	1.06
Calculation factor $f_{HC}$	1.01
Calculation factor e	0.68
Calculation factor (single, tandem) $Y_2$	0.87
Calculation factor (back-to-back, face-to-face) $Y_1$	0.92
Calculation factor (back-to-back, face-to-face) $Y_2$	1.41
Mass bearing	0.41 kg